




DESCRIPTION

The sound waves penetrate the open-cell structure, thus reducing the reflected energy and giving this product an excellent noise divider and sound absorption capacity.

FEATURES

- NRC: **0.70/m²**
- Soundproofing: 39db
- Fire-resistance: Germany B1, France M1, GB Class 1, USA V0 / HF1
- Available in two sizes
- Quick assembly; mobile solution for events or to be permanently installed.
- Can be used as a curtain or as a sound divider
- Improves sound's intelligibility and sound insulation between different adjacent performing spaces
- Raw materials: Polyurethane, fabric agglomerate, acoustic foam and fabric.


TECHNICAL DRAWINGS

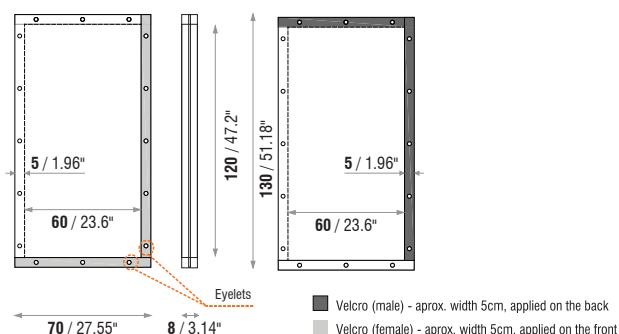

MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
ISB 120	120 cm (47.2 in)	60 cm (23.6 in)	8 cm (3.14")	0.9 Kg (1.98 lbs)
ISB 240	240 cm (94.48 in)	60 cm (23.6 in)	8 cm (3.14")	3.6 Kg (7.93 lbs)

ABSORPTION COEFFICIENT

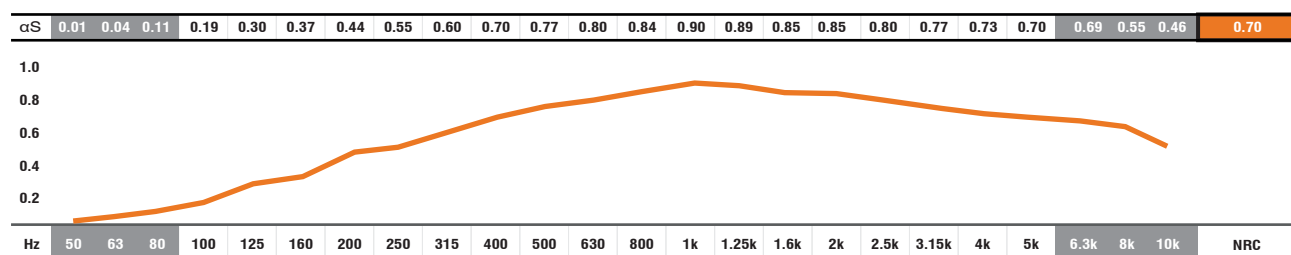

- Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

STANDARD FABRIC COLOURS / (Other customized colours available on demand)



BLACK



CUSTOM
Within RAL
Colour System

IMPORTANT NOTICES

- * JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- * The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- * Colours may vary due to raw-material suppliers' changes and some differences may occur in total range.
- * Due to its natural origin, wood-based products will always present natural imperfections inherent to the organic nature. And for similar reasons, they will also present traces of old-age in the course of time.
- * Wood and fabric products are highly susceptible to change its appearance with humidity and temperature. Close attention must be paid to the storage conditions and the acclimatization before, during and after the installation.
- * Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- * Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.