



DunA®
ABSORBENT PANEL



Image of 120x60cm model Ref.:DUN120 (on the left) and applied (ambient image).

DESCRIPTION

DunA® absorption panels are mid-range acoustic absorbers manufactured from premium melamine foam or controlled-cell acoustic foam, offering high acoustic efficiency and consistent performance.

Their modular male-female geometry enables seamless integration and continuous surface coverage, effectively correcting room acoustic anomalies.


DunA® panels provide high absorption across a broad frequency range, with enhanced efficiency in medium-to-high frequencies, significantly improving speech intelligibility, clarity, and reverberation control.

Suitable for wall and ceiling installation, they are ideal for project studios, hi-fi rooms, home cinemas, broadcast rooms, and critical listening environments. For balanced acoustic treatment, they can be combined with DunAd diffusion panels of identical geometry.

FEATURES

- Raw material: Melamine Foam or Regular Acoustic Foam.
- NRC: **0.95/m²** [$>250\text{Hz}; <10\text{kHz}$].
- **MELAMINE FOAM** - Flame resistance: Euroclass B-s1,d0 (similar to old M1 France, Germany B1,GB class1, USA V0/HF1).
- **REGULAR FOAM** - Flame resistance: Euroclass B-s3,d1 (similar to old M1).
- Great decorative alternatives.
- Sold in pairs.

TECHNICAL DRAWINGS

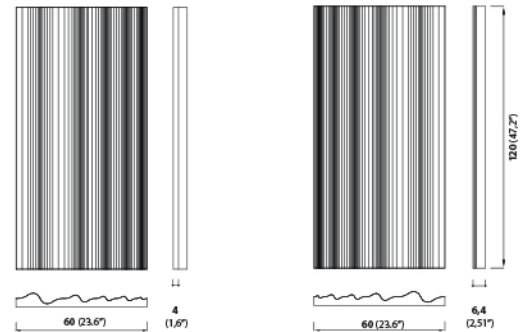


MODELS AND SIZES

MODELS	HEIGHT	WIDTH	DEPTH	WEIGHT
DUN120	120 cm (47.2")	60 cm (23.6")	6.4 cm (2.51")	0.6 Kg (1.32 lbs)

SOLD IN PAIRS

(Dimensions & weight are per unit)

ABSORPTION COEFFICIENT

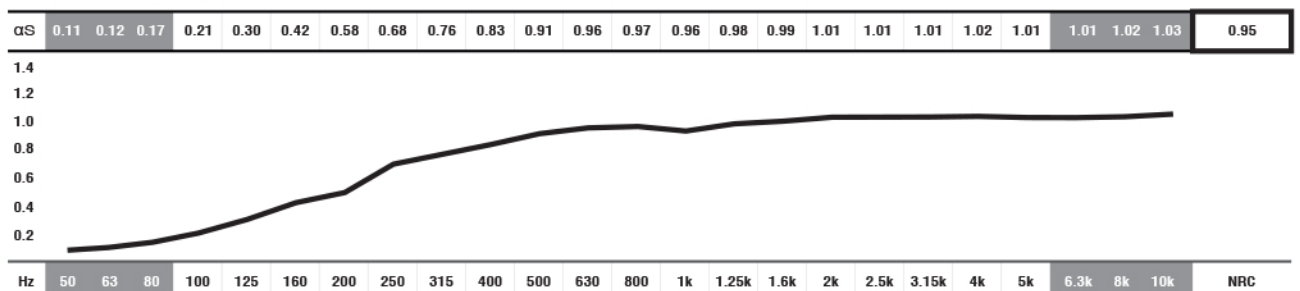


■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

REGULAR AND MELAMINE FOAM COLOURS



VELVETY FINISHINGS (only available in Melamine Foam)



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range. Close attention must be paid to the storage conditions and the acclimatization before, during and after the installation.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 80%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly due to their production method and some inherent raw-materials characteristics.