




ATP[®] PACK 04

ROOMS FROM
24 TO 30 M²

04

Rooms from
260 ft² to 323 ft²

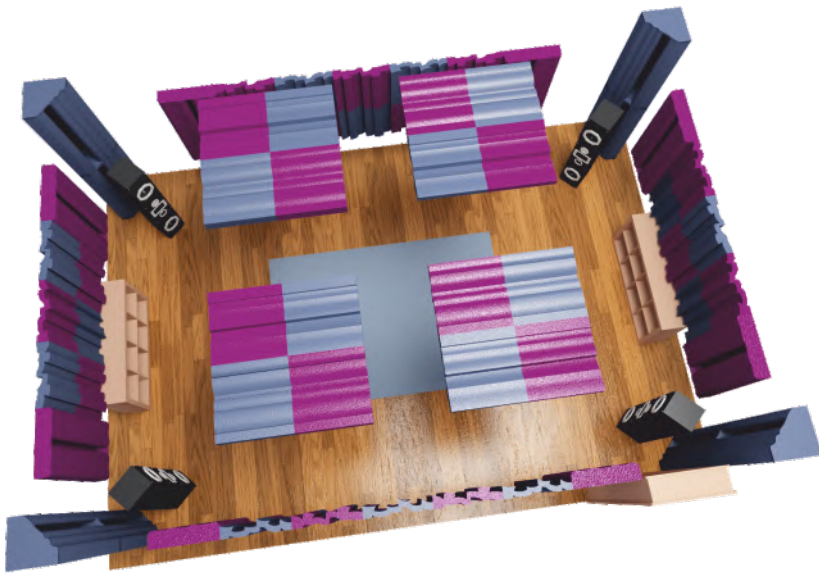

EXCELLENCE
Sabine: 0.50 sec



STANDARD
Sabine: 0.54 sec

DESCRIPTION

The **ATP[®] PACK 04** is specific for large-sized music rooms, as it was designed for rooms measuring between 24 and 30 m² (258.33 ft² and 322.92 ft²).

You can choose from the two **ATP[®] PACK 04** available solutions: **STANDARD** or **EXCELLENCE**, depending on your needs and aesthetic taste.

It provides acoustic comfort in control room studios, recording rooms, hi-fi or home-cinema rooms, rehearsal rooms, etc. It uses low-frequency tuned modules, **BKA120** and **BKW120**, which are duly balanced with the absorbers and diffusers **FS0060** and **WAV060**, as pictures show.

The application of the low-frequency tuned absorbers in the corners of the room and on the walls is mandatory, in this case, to hold the energy at low frequencies.

The integration of the acoustic modules, sound system and listener is decisive for a good audition, therefore minimising the differences in the distribution of the acoustic pressure and minimising the modal emphasis and SBIR (speaker-boundary interference response). Give your ears an opportunity and see how the performance of your sound system improves.

WHERE TO APPLY :

Rooms with an area between: 24 and 30 square meters (258.33 ft² and 322.92 ft²).


Rooms with volumes between: 58 and 90 cubic meters (2048 ft³ and 3178 ft³).

For use in control room studios, tracking rooms, hi-fi or home-cinema rooms, rehearsal rooms, etc.

FEATURES

- Values were obtained by simulation in specific JAS[®] software and later confirmed through acoustic analyses in the rooms.
- The simulated and tested rooms are totally empty, and only the referred **ATP[®] PACK 04** acoustic panels are applied.
- Traditional room with dimensions (L,W,H): **6.52m / 4.48m / 2.80m** (256.7' / 176.4' / 110.2'). Walls: masonry with painted fine stuff and a wooden door.
Ceiling: 12 mm (0.5") - thick plaster.
Floor: natural floating parquet.


STANDARD EPS RAL COLOURS

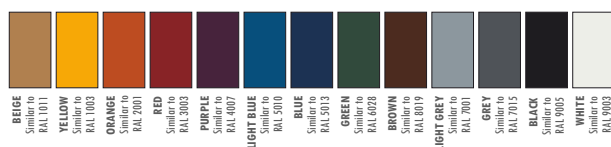

IMPORTANT NOTICES

- JOCAVI[®] accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI[®] products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly (+/-3mm) due to their production method and some inherent raw-materials characteristics.

ABSORPTION COEFFICIENT AND GRAPHIC

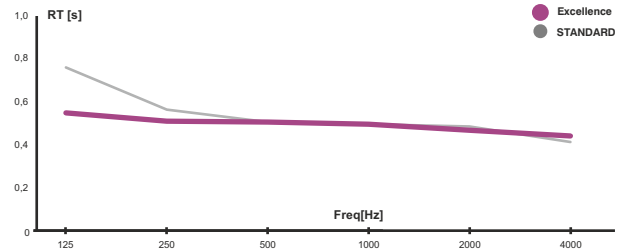


FREQUENCY	125 Hz	250 Hz	500 Hz	1 KHz	2 KHz	4 KHz	RT60
● Excellence	0.55	0.52	0.52	0.50	0.47	0.45	0.50
● STANDARD	0.77	0.57	0.52	0.50	0.48	0.42	0.54

PACK QUANTITIES

REFERENCE	PANELS	UNITS	DIFFUSOR	ABSORBENT	TUNED
● WAV060 / WAI060	WAVYFUSER/INV	24	✓	-	-
● FS0060 / FSI060	FOAMSORB/INV	24	-	✓	-
● BKA120	BASSKEEPER ANGLE	8	-	-	✓
● BKW120	BASSKEEPER WALL	8	-	-	✓

REFERENCE	PANELS	UNITS	DIFFUSOR	ABSORBENT	TUNED
● STS120	STRIPESORB	28	-	✓	-
● T3S120	TRAP 30S	8	-	✓	-

REGULAR FOAM COLOURS

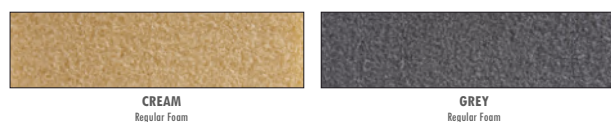

CREAM
Regular Foam

GREY
Regular Foam

