

Sabine: 0.27 sec



DESCRIPTION

The **JOCAVI® KIT BOX 03** has been created for rooms with an area between 17 and 30 m² (182.99 ft² and 322.92 ft²), so small or medium-sized rooms such as home-cinema rooms, home-studios and rehearsal rooms.

JOCAVI® KIT BOX 03 it is composed of STAITREAT® acoustic modules which consists of three different models with very different acoustic features though with the same appearance, namely: STAITREAT® BXA® as a Low-frequency absorbent tuned at 80Hz, the BXW® as a Low-frequency absorbent tuned at 160Hz and the WBA®, which is a broad band mid-high absorbent.

As a whole, these three different specificities provide an outstanding acoustic balance, thus the resulting aesthetic look is a light and very pleasant design.

The finishing plate is similar to the three options and conceals the remaining engineering portion of each model. This pressed mineral granulate plate also combines absorption with unidirectional micro-diffusion features.

This KIT of panels it is the most recommended pack of acoustic panels for those who want an authentic acoustic balance with a sober decoration.

WHERE TO APPLY :

Rooms with an area between: 17 and 30 square meters (182.99 ft² and 322.92 ft²).


Rooms with volumes between: 58 and 90 cubic meters (2048 ft³ and 3178 ft³).

For use in small-sized home-theatre rooms, home-studios, Hi-fi rooms or instrument rooms.

FEATURES

- Values were obtained by simulation in specific JAS® software and later confirmed through acoustic analyses in the rooms.
 - The simulated rooms were tested with all the materials and equipments shown in the images, and the mentioned **JOCAVI® KIT BOX 03** acoustic panels.
 - Traditional room with dimensions (L,W,H): **4.90m / 3.60m / 2.80m** (192.9"/141.7"/110.2") or other dimensions until 30m² (322.92 ft²).
- Walls: masonry with painted fine stuff and a wooden door.
Ceiling: 12 mm (0.5") - thick plaster.
Floor: natural floating parquet.


STANDARD MINERAL GRANULATED COLOURS



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Sizes may vary slightly (+/-3mm) due to their production method and some inherent raw-materials characteristics.

ABSORPTION COEFFICIENT AND GRAPHIC

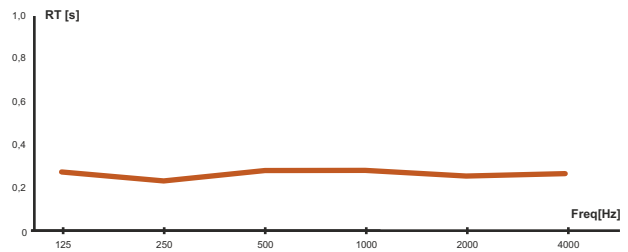

Sabine: 0.27 sec

KITBOX 03 QUANTITIES

REFERENCE	PANELS	UNITS	DIFFUSOR	ABSORBENT	TUNED
BXA060	Staidreat® BXA	12	—	—	✓
BXW060	Staidreat® BXW	34	—	—	✓
WBA060	Staidreat® WBA	37	—	✓	—

