



DECOART®
ABSORBENT PANEL



Image of a pair of the 96x30cm model Ref.:DAT096 (on the left) and Ref.:DAT096 applied (ambient image).

DESCRIPTION

The DECOART® is an acoustic treatment absorber made of self-extinguishing acoustic foam. It has an angular arc-shaped geometry describing two elevations "up and down" that make it very attractive when combined with numerous modules.

When observed from a perpendicular perspective, it has a beautiful and harmonised appearance, which is particularly attractive for common areas in public spaces.

The creation of surfaces that are efficient at absorbing sound waves becomes imperative, and that is the main feature that makes this product so relevant.

The DECOART® is perfect to cover continuous areas of walls or ceilings as a coating material and can be used as a soundproofing reinforcement as well.


It is ideal for commercial areas, television studios, pavilions, auditoriums, meeting rooms, public spaces, etc., that need specific care regarding airborne noise control.

It can be easily cut with a knife to be adjusted to the dimensions of walls and ceilings.

FEATURES

- Raw material: Melamine Foam or Regular Acoustic Foam.
- NRC: **0.84/m²** [$>250\text{Hz}$; $<10\text{KHz}$].
- **MELAMINE FOAM** - Flame resistance: Euroclass B-s1,d0 (similar to old M1 France, Germany B1,GB class1, USA V0/HF1).
- **ACOUSTIC FOAM** - Flame resistance: Euroclass B-s3,d1 (similar to old M1).
- Velvety Finishing available.
- Shape and design recommended for continuous surface treatment.
- 100% recyclable.
- Sold in pairs

ABSORPTION COEFFICIENT

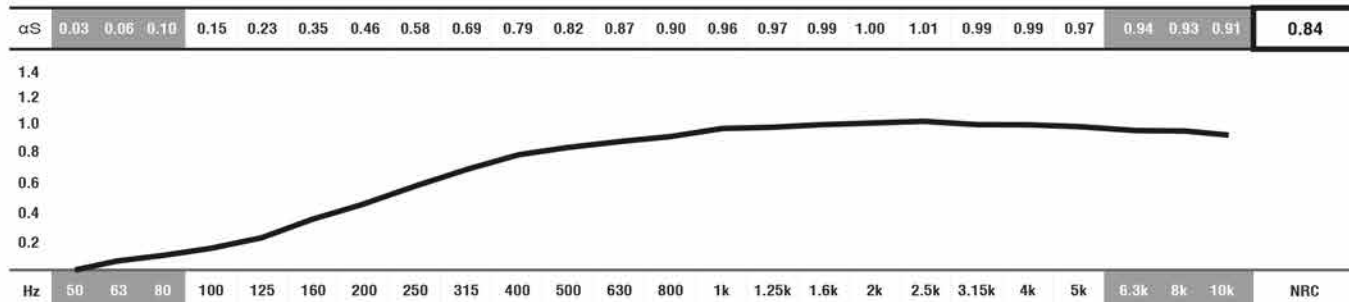

■ ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [$<100\text{Hz}$ and $>5\text{K}$] are Non Standard Values.

*PANEL DATA ONLY OF REF.: DAT096 REGULAR FOAM.

REGULAR AND MELAMINE FOAM COLOURS



VELVETY COLOURS (only available in Melamine Foam)



IMPORTANT NOTICES

- JOCAVI® accepts no responsibility for any printing errors. Specifications can be modified without prior notice, if technical or commercial reasons so require.
- The colours shown on this catalogue are only a reference and an illustration of the products finishing. The colours shown are not binding because brightness, contrast and colour balance may vary due to the printing process.
- Colours may vary due to raw-material suppliers' changes and some differences may occur in tonal range.
- Typical Indoor Comfort Standards state a temperature range of 20°C - 27°C (68°F - 81°F), and a relative humidity of less than 60%. These would be considered as normal operational levels of JOCAVI® products' range.
- Despite all the standard sizes of all products, this model can be customised upon previous consultation. Sizes may vary slightly ($\pm 3\text{mm}$) due to their production method and some inherent raw-materials characteristics.

JOCAVITM Acoustic panels

www.jocavi.net

Tel +1 (973) 536 18 32
Tel +1 (917) 294 34 11
Email info@jocaviusa.com

JOCAVI USA Corporation
146-B Ferry Street, Unit 196
07105 Newark, NJ, US

Tel (+351) 21 924 30 97
Email info@jocavi.net

JOCAVI International
Av. Pedro Álvares Cabral, Sintra Estoril V - B18
2710-297 Sintra, Portugal